



Electromagnetic Flow Meters

M5000 (M5000 Refresh)

DESCRIPTION

Designed, developed and manufactured under strict quality standards, the M5000 electromagnetic flow meter features sophisticated, processor-based signal conversion with accuracies of $\pm 0.4\%$. Based on Faraday's Law of Induction, these meters can measure potable water, reclaimed water, ground water and clear, water-based applications that have minimal electrical conductivity.

With no moving parts in the flow stream, there is no pressure loss. Also, accuracy is not affected by temperature, pressure, viscosity or density and there is practically no maintenance required. It is encased in an IP67 housing (optional IP68), which makes it a reliable meter even when submerged.

APPLICATION

The M5000 mag meter is designed for applications without power line access, where flow is continuous, and when indication of rate and totalization are required. The M5000 can accurately measure fluid flow—the fluid is potable or reclaimed water and can contain a moderate amount of solids. The meter is successfully used in water distribution networks and irrigation.

The standard meter is equipped with an internal datalogger or M-Bus interface, or optionally with an externally powered RS485 interface with Modbus®. The collected data can also be retrieved via radio frequency or GSM/GPRS. The data can then be centrally compiled and evaluated. The meter can be checked without process interruption using the Verification Device.

OPERATING PRINCIPLE

The flow meter is a stainless steel tube lined with a non-conductive material. Outside the tube are two DC-powered electromagnetic coils positioned opposite each other. Perpendicular to the coils are two electrodes inserted into the flow tube. The energized coils create a magnetic field across the diameter of the pipe.

As a conductive fluid flows through the magnetic field, a voltage is induced across the electrodes. This voltage is proportional to the average flow velocity of the fluid and is measured by the two electrodes. This induced voltage is then amplified and digitally processed by the converter to produce an accurate analog or digital signal. The signal can then be used to indicate flow rate and totalization, or to communicate to remote sensors and controllers. In addition, the processor controls zero-flow stability, frequency outputs, serial communications, and other parameters.



FEATURES

- Available in sizes 1/2...24 in. (DN 15...600)
- Battery powered, with battery life up to 20 years
- $\pm 0.4\%$ of measured value ± 2 mm/s accuracy independent of fluid viscosity, density and temperature
- Unaffected by most solids contained in fluids
- LCD Display
- Pulsed DC magnetic field for zero point stability
- No pressure loss for low operational costs
- Corrosion resistant liners for long life
- Calibrated in state-of-the art facilities
- Integral and remote signal converter availability
- Optional grounding rings or grounding electrode
- Measurement largely independent of flow profile
- Low-power digital microcontroller (16 bit)
- Simple programming procedure
- Digital and infrared outputs
- Automatic zero-point stability
- Non-volatile programming
- NSF/ANSI/CAN 61 and 372, OIML, MID and AWWA C715 certified
- Data logging
- Verification device
- IP67/IP68 protection class
- Modbus RTU (RS232), IRDA, M-Bus, optional Modbus RTU (RS 485)
- BEACON®/AquaCUE® connectivity





ELECTRODES

When looking from the end of the meter into the inside bore, the two measuring electrodes are positioned at three o'clock and nine o'clock. M5000 mag meters have an "empty pipe detection" feature. This is accomplished with a third electrode positioned in the meter between twelve o'clock and one o'clock.

If this electrode is not covered by fluid for a minimum five-second duration, the meter will display an "empty pipe detection" condition, send out an error message, if desired, and stop measuring to maintain accuracy. When the electrode again becomes covered with fluid, the error message will disappear and the meter will continue measuring.

The wide selection of liner and electrode materials helps provide maximum compatibility and minimum maintenance over a long operating period. The M5000 amplifier can be integrally mounted to the detector, or if necessary, mounted remotely. The amplifier is housed in a NEMA 4X (IP67) enclosure.

In addition to using grounding rings, a grounding electrode (fourth electrode) can be built into the meter during manufacturing to assure proper grounding. The position of this electrode is at five o'clock.

SPECIFICATIONS


NOTE: Measurements in DN are for Nominal Diameter in mm.

M5000 Amplifier

Flow Range	0.1...32.8 ft/s (0.03...10 m/s)
Accuracy	± 0.4% of measured value ± 2 mm/s OIML/MID: 2...24 in. (DN50...600) with Od up and Od downstream ±1% ≥ 1.2 ft/s (0.35 m/s)
Repeatability	± 0.1%
Data Logging Ambient Temperature	About 7,000 records (read out by Modbus or IrDA interface) Logging interval from 1 min to 24 h -4...140° F (-20...60° C)
Flow Direction	Uni-directional or bi-directional. Two separate programmable totalizers for uni-directional measurement.
Digital Outputs (4)	Galvanically isolated open collector, 30V DC maximum, 20 mA each, maximum output frequency at 100 Hz Absolute Digital Encoded output for connectivity to AquaCUE or BEACON cellular endpoints
Status Outputs	ADE, High/low flow alarm (0...100% of flow), error alarm, empty pipe alarm, flow direction
Communication	RS232, Modbus RTU, IrDA, M-Bus, RS 485 (optional), External AMR or GSM/GPRS module (optional)
Empty Pipe Detection	Separate electrode, field-tunable for optimum performance based on specific application
Min-Max Flow Alarm	Programmable outputs 0...100% of flow
Low Flow Cut-Off	Programmable 0...10% of maximum flow
Galvanic Separation	Functional 500 volts
Pulse Width	Programmable 5...500 ms
Coil Power	Pulsed DC
Sampling Rate	Programmable from 1 to 63 seconds. Standard sampling period is 15 seconds.
Display	Two lines x 15 characters (7 on top + 8 on bottom), LCD display
Programming	Three external buttons
Units of Measure	Gallons, ounces, MGD, liters, cubic meters, cubic feet, imperial gallon, barrel, hectoliter and acre feet
Battery Life	<i>Standard:</i> 10 years with one battery pack; <i>optional:</i> up to 20 years with two battery packs for sizes 6 in. (DN 150) or smaller.
Power Supply	<i>Standard:</i> Internal lithium batteries 3.6 volt, optional external battery pack <i>Optional:</i> battery back-up model (100...240V AC or 9...36V DC) Low power microcontroller (16 bit)
Processing	NEMA 4X (IP67, optional IP68), cast aluminum, powder-coated paint
Amplifier Housing	Detector-mount or remote wall mount (bracket supplied)
Mounting	
Meter Enclosure Classification	<i>Standard:</i> NEMA 4X (IP67); <i>Optional:</i> Submersible NEMA 6P IP68, remote amplifier required
Junction Box Enclosure Protection	For remote amplifier option: <i>Standard:</i> Powder coated die-cast aluminum, NEMA 4 (IP67) <i>Optional:</i> Stainless steel housing 304, Submersible NEMA 6P (IP68)
Approvals	NSF/ANSI/CAN 61 and 372 OIML R49-1 MID MI-001 AWWA C715 WRAS (hard rubber) ACS (PTFE) KTW (PTFE) MCERT



M5000 Amplifier Dimensions

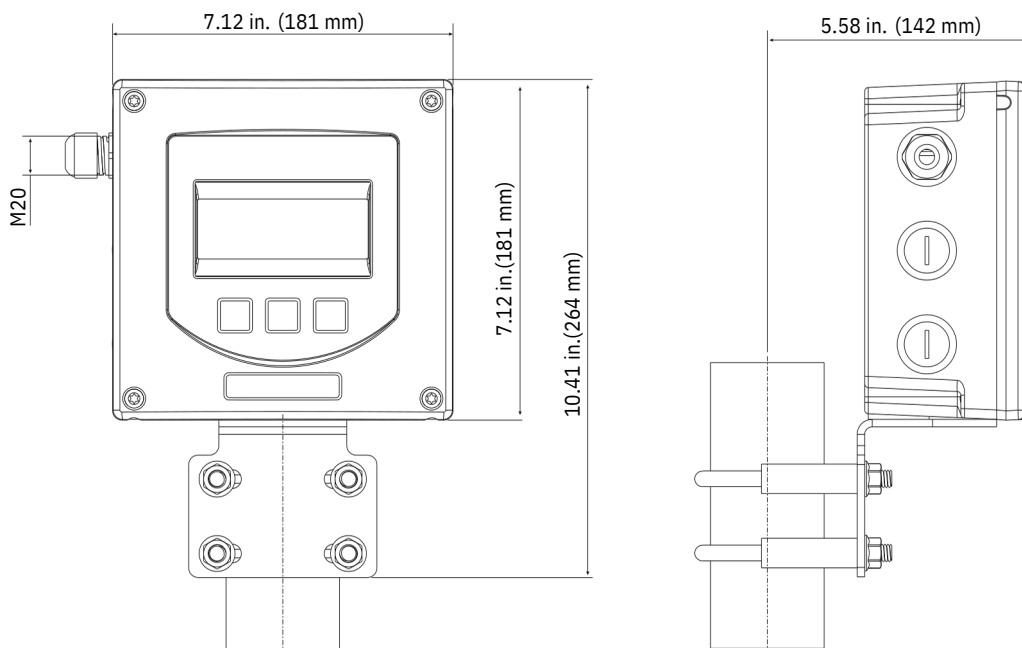

Detector Weight and Flow Range


Size in. (DN)	Est. Weight with Amplifier lb (kg)	Flow Range	
		US	Metric
1/2 (15)	17 (7.7)	0.084...28.0 GPM	0.318...106 l/min
3/4 (20)	17 (7.7)	0.149...49.8 GPM	0.57...188 l/min
1 (25)	18 (8.8)	0.233...78 GPM	0.88...295 l/min
1-1/4 (32)	20.3 (9.2)	0.382...127 GPM	1.45...483 l/min
1-1/2 (40)	22 (10)	0.60...199 GPM	2.26...754 l/min
2 (50)	26 (11.7)	0.93...311 GPM	3.53...1,178 l/min
2-1/2 (65)	35 (15.7)	1.58...526 GPM	0.358...119 m³/h
3 (80)	38 (17.1)	2.39...797 GPM	0.54...181 m³/h
4 (100)	49 (22.1)	3.73...1245 GPM	0.85...283 m³/h
5 (125)	60 (27.1)	5.8...1945 GPM	1.33...442 m³/h
6 (150)	71 (32.1)	8.4...2801 GPM	1.91...636 m³/h
8 (200)	96 (43.1)	14.9...4979 GPM	3.39...1131 m³/h
10 (250)	130 (59.1)	23.3...7780 GPM	5.3...1767 m³/h
12 (300)	219 (99.3)	33.6...11,204 GPM	7.6...2545 m³/h
14 (350)	287 (130.2)	45.7...15,249 GPM	10.4...3464 m³/h
16 (400)	354 (160.9)	60...19,918 GPM	13.6...4524 m³/h
18 (450)	409 (185.3)	76...25,208 GPM	17.2...5725 m³/h
20 (500)	502 (228.3)	93...31,121 GPM	21.2...7068 m³/h
22 (550)	532 (241.3)	113...37,657 GPM	25.7...8553 m³/h
24 (600)	561 (255.3)	134...44,814 GPM	30.5...10,178 m³/h




Detector Type VI

Size	1/2...24 in. (DN 15...600)			
Process Connection	Flange Type	DIN, ANSI, JIS, AWWA and more		
	Material	Standard: carbon steel; optional: stainless steel 304/316		
Pressure Limits	Up to 1450 psi (100 bar) PED			
Meter Enclosure Classification	Standard: NEMA 4X (IP67); Optional: Submersible NEMA 6P IP68, remote amplifier required			
Minimum Conductivity	≥20 µS/cm			
Liners	Material	Available for sizes	Fluid Temp for Remote Mount	Fluid Temp for Meter Mount
	PTFE	1/2...24 in. (DN 15...600)	302° F (150° C)	212° F (100° C)
	Hard rubber	1...24 in. (DN 25...600)	178° F (80° C)	178° F (80° C)
	ETFE	12...24 in. (DN 300...600)	302° F (150° C)	212° F (100° C)
Electrode Materials	Standard: Hastelloy® C; optional: Tantalum, Platinum/Gold plated, Platinum/Rhodium, 316 stainless steel			
Meter Housing Material	Standard: Carbon steel painted; optional: Stainless steel 304/316 or painted in C5M			
Optional Stainless Steel Grounding Rings	ANSI Flanges		All Other Flanges	
	Meter Size	Thickness (of 1 ring)	Meter Size	Thickness (of 1 ring)
	Up through 10 in. 12...24 in.	0.135 in. (3.42 mm) 0.187 in. (4.75 mm)	1/2... 24 in.	0.12 in. (3 mm)

Remote Version

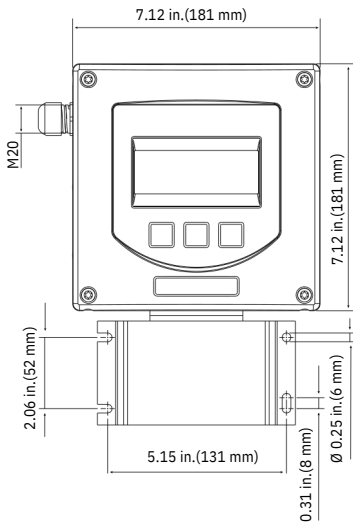

Mounted Version

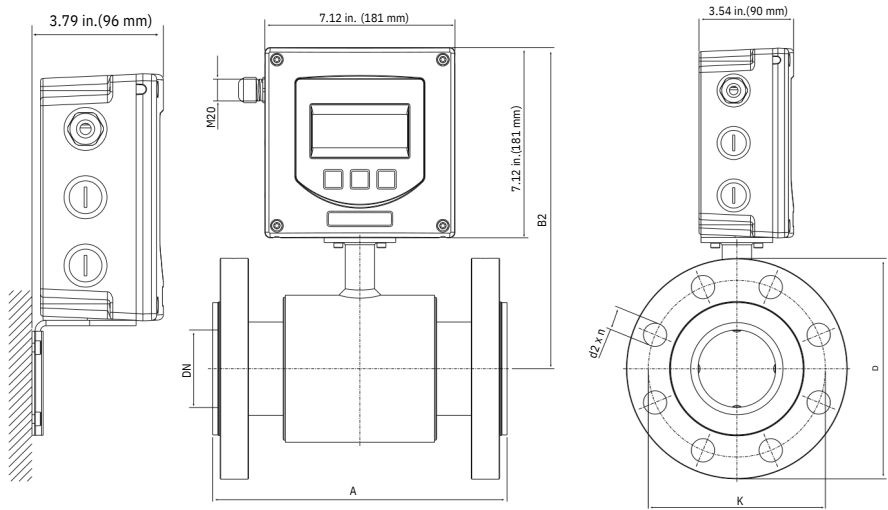



Flange ANSI Class 150 ASME B16.5

Size DN		A Standard		AISO*		B1		B2		D		K		d2 x n	
inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm
1/2	15	6.7	170	7.9	200	7.0	177	10.8	274	3.5	89	2.4	61	0.6 x 4	16 x 4
3/4	20	6.7	170	7.9	200	7.0	177	10.8	274	3.9	99	2.8	71	0.6 x 4	16 x 4
1	25	8.9	225	7.9	200	7.0	177	10.8	274	4.3	109	3.1	79	0.6 x 4	16 x 4
1-1/4	32	8.9	225	7.9	200	7.6	192	11.4	289	4.6	117	3.5	89	0.6 x 4	16 x 4
1-1/2	40	8.9	225	7.9	200	7.6	192	11.4	289	5.0	127	3.9	99	0.6 x 4	16 x 4
2	50	8.9	225	7.9	200	7.6	192	11.4	289	6.0	152	4.8	122	0.8 x 4	19 x 4
2-1/2	65	11.0	280	7.9	200	8.3	210	12.1	307	7.0	178	5.5	140	0.8 x 4	19 x 4
3	80	11.0	280	7.9	200	8.3	210	12.1	307	7.5	191	6.0	152	0.8 x 4	19 x 4
4	100	11.0	280	9.8	250	8.5	217	12.4	314	9.0	229	7.5	191	0.8 x 8	19 x 8
5	125	15.7	400	9.8	250	9.3	237	13.1	334	10.0	254	8.5	216	0.9 x 8	22 x 8
6	150	15.7	400	11.8	300	9.8	249	13.6	346	11.0	279	9.5	241	0.9 x 8	22 x 8
8	200	15.7	400	13.8	350	10.9	277	14.7	374	13.5	343	11.8	300	0.9 x 8	22 x 8
10	250	19.7	500	17.7	450	11.9	301	15.7	398	16.0	406	14.3	363	1.0 x 12	25 x 12
12	300	19.7	500	19.7	500	14.3	364	18.1	461	19.0	483	17.0	432	1.0 x 12	25 x 12
14	350	19.7	500	21.7	550	15.3	389	19.1	486	21.0	533	18.8	478	1.1 x 12	28 x 12
16	400	23.6	600	23.6	600	16.3	414	20.1	511	23.5	597	21.3	541	1.1 x 16	28 x 16
18	450	23.6	600	23.6	600	17.3	439	21.1	536	25.0	635	22.8	579	1.3 x 16	32 x 16
20	500	23.6	600	23.6	600	18.3	464	22.1	561	27.5	699	25.0	635	1.3 x 20	32 x 20
24	600	23.6	600	23.6	600	20.7	527	24.6	624	32.0	813	29.5	749	1.4 x 20	35 x 20
Other sizes on request															

IMPORTANT: ISO* sensor lay length according to ISO 20456

Flange ANSI Class 300 ASME B16.5

Size DN		A Standard		A ISO*		B1		B2		D		K		d2 x n	
inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm
1/2	15	6.7	170	7.9	200	7.0	177	10.8	274	3.8	95	2.6	67	0.6 x 4	16 x 4
3/4	20	6.7	170	7.9	200	7.0	177	10.8	274	4.6	117	3.3	83	0.8 x 4	19 x 4
1	25	8.9	225	7.9	200	7.0	177	10.8	274	4.9	124	3.5	89	0.8 x 4	19 x 4
1-1/4	32	8.9	225	7.9	200	7.6	192	11.4	289	5.3	133	3.9	99	0.8 x 4	19 x 4
1-1/2	40	8.9	225	7.9	200	7.6	192	11.4	289	6.1	155	4.5	114	0.9 x 4	22 x 4
2	50	8.9	225	7.9	200	7.6	192	11.4	289	6.5	165	5.0	127	0.8 x 8	19 x 8
2-1/2	65	11.0	280	7.9	200	8.3	210	12.1	307	7.5	191	5.9	149	0.9 x 8	22 x 8
3	80	11.0	280	7.9	200	8.3	210	12.1	307	8.3	210	6.6	168	0.9 x 8	22 x 8
4	100	11.0	280	9.8	250	8.5	217	12.4	314	10.0	254	7.9	200	0.9 x 8	22 x 8
5	125	15.7	400	9.8	250	9.3	237	13.1	334	11.0	279	9.3	235	0.9 x 8	22 x 8
6	150	15.7	400	11.8	300	9.8	249	13.6	346	12.5	318	10.6	270	0.9 x 12	22 x 12
8	200	15.7	400	13.8	350	10.9	277	14.7	374	15.0	381	13.0	330	1.0 x 12	25 x 12
10	250	19.7	500	17.7	450	11.9	301	15.7	398	17.5	445	15.3	387	1.1 x 16	28 x 16
12	300	19.7	500	19.7	500	14.3	364	18.1	461	20.5	521	17.8	451	1.3 x 16	32 x 16
14	350	19.7	500	21.7	550	15.3	389	19.1	486	23.0	584	20.3	514	1.3 x 20	32 x 20
16	400	23.6	600	23.6	600	16.3	414	20.1	511	25.5	648	22.5	572	1.4 x 20	35 x 20
18	450	23.6	600	23.6	600	17.3	439	21.1	536	28.0	711	24.8	629	1.4 x 24	35 x 24
20	500	23.6	600	23.6	600	18.3	464	22.1	561	30.5	775	27.0	686	1.4 x 24	35 x 24
24	600	23.6	600	23.6	600	20.7	527	24.6	624	36.0	914	32.0	813	1.6 x 24	41 x 24
Other sizes on request															

IMPORTANT: ISO* sensor lay length according to ISO 20456

Flange EN 1092-1 / PN 10

Size DN		A Standard		A ISO*		B1		B2		D		K		d2 x n	
inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm
8	200	15.7	400	13.8	350	10.9	277	14.7	374	13.4	340	11.6	295	0.9 x 8	22 x 8
10	250	19.7	500	17.7	450	11.9	301	15.7	398	15.6	395	13.8	350	0.9 x 12	22 x 12
12	300	19.7	500	19.7	500	14.3	364	18.1	461	17.5	445	15.7	400	0.9 x 12	22 x 12
14	350	19.7	500	21.7	550	15.3	389	19.1	486	19.9	505	18.1	460	0.9 x 16	22 x 16
16	400	23.6	600	23.6	600	16.3	414	20.1	511	22.2	565	20.3	515	1.0 x 16	26 x 16
18	450	23.6	600	23.6	600	17.3	439	21.1	536	24.2	615	22.2	565	1.0 x 20	26 x 20
20	500	23.6	600	23.6	600	18.3	464	22.1	561	26.4	670	24.4	620	1.0 x 20	26 x 20
24	600	23.6	600	23.6	600	20.7	527	24.6	624	30.7	780	28.5	725	1.2 x 20	30 x 20
Other sizes on request															

IMPORTANT: ISO* sensor lay length according to ISO 20456



Flange EN 1092-1 / PN 16

Size DN		A Standard		A ISO*		B1		B2		D		K		d2 x n	
inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm
1/2	15	6.7	170	7.9	200	7.0	177	10.8	274	3.7	95	2.6	65	0.6 x 4	14 x 4
3/4	20	6.7	170	7.9	200	7.0	177	10.8	274	4.1	105	3.0	75	0.6 x 4	14 x 4
1	25	8.9	225	7.9	200	7.0	177	10.8	274	4.5	115	3.3	85	0.6 x 4	14 x 4
1-1/4	32	8.9	225	7.9	200	7.6	192	11.4	289	5.5	140	3.9	100	0.7 x 4	18 x 4
1-1/2	40	8.9	225	7.9	200	7.6	192	11.4	289	5.9	150	4.3	110	0.7 x 4	18 x 4
2	50	8.9	225	7.9	200	7.6	192	11.4	289	6.5	165	4.9	125	0.7 x 4	18 x 4
2-1/2	65	11.0	280	7.9	200	8.3	210	12.1	307	7.3	185	5.7	145	0.7 x 8	18 x 8
3	80	11.0	280	7.9	200	8.3	210	12.1	307	7.9	200	6.3	160	0.7 x 8	18 x 8
4	100	11.0	280	9.8	250	8.5	217	12.4	314	8.7	220	7.1	180	0.7 x 8	18 x 8
5	125	15.7	400	9.8	250	9.3	237	13.1	334	9.8	250	8.3	210	0.7 x 8	18 x 8
6	150	15.7	400	11.8	300	9.8	249	13.6	346	11.2	285	9.4	240	0.9 x 8	22 x 8
8	200	15.7	400	13.8	350	10.9	277	14.7	374	13.4	340	11.6	295	0.9 x 12	22 x 12
10	250	19.7	500	17.7	450	11.9	301	15.7	398	15.9	405	14.0	355	1.0 x 12	26 x 12
12	300	19.7	500	19.7	500	14.3	364	18.1	461	18.1	460	16.1	410	1.0 x 12	26 x 12
14	350	19.7	500	21.7	550	15.3	389	19.1	486	20.5	520	18.5	470	1.0 x 16	26 x 16
16	400	23.6	600	23.6	600	16.3	414	20.1	511	22.8	580	20.7	525	1.2 x 16	30 x 16
18	450	23.6	600	23.6	600	17.3	439	21.1	536	25.2	640	23.0	585	1.2 x 20	30 x 20
20	500	23.6	600	23.6	600	18.3	464	22.1	561	28.1	715	25.6	650	1.3 x 20	33 x 20
24	600	23.6	600	23.6	600	20.7	527	24.6	624	33.1	840	30.3	770	1.4 x 20	36 x 20
Other sizes on request															

IMPORTANT: ISO* sensor lay length according to ISO 20456

Flange EN 1092-1 / PN 25

Size DN		A Standard		A ISO*		B1		B2		D		K		d2 x n	
inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm
1/2	15	6.7	170	7.9	200	7.0	177	10.8	274	3.7	95	2.6	65	0.6 x 4	14 x 4
3/4	20	6.7	170	7.9	200	7.0	177	10.8	274	4.1	105	3.0	75	0.6 x 4	14 x 4
1	25	8.9	225	7.9	200	7.0	177	10.8	274	4.5	115	3.3	85	0.6 x 4	14 x 4
1-1/4	32	8.9	225	7.9	200	7.6	192	11.4	289	5.5	140	3.9	100	0.7 x 4	18 x 4
1-1/2	40	8.9	225	7.9	200	7.6	192	11.4	289	5.9	150	4.3	110	0.7 x 4	18 x 4
2	50	8.9	225	7.9	200	7.6	192	11.4	289	6.5	165	4.9	125	0.7 x 4	18 x 4
2-1/2	65	11.0	280	7.9	200	8.3	210	12.1	307	7.3	185	5.7	145	0.7 x 4	18 x 8
3	80	11.0	280	7.9	200	8.3	210	12.1	307	7.9	200	6.3	160	0.7 x 8	18 x 8
4	100	11.0	280	9.8	250	8.5	217	12.4	314	9.3	235	7.5	190	0.9 x 8	22 x 8
5	125	15.7	400	9.8	250	9.3	237	13.1	334	10.6	270	8.7	220	1.0 x 8	26 x 8
6	150	15.7	400	11.8	300	9.8	249	13.6	346	11.8	300	9.8	250	1.0 x 8	26 x 8
8	200	15.7	400	13.8	350	10.9	277	14.7	374	14.2	360	12.2	310	1.0 x 8	26 x 12
10	250	19.7	500	17.7	450	11.9	301	15.7	398	16.7	425	14.6	370	1.2 x 12	30 x 12
12	300	19.7	500	19.7	500	14.3	364	18.1	461	19.1	485	16.9	430	1.2 x 12	30 x 16
14	350	19.7	500	21.7	550	15.3	389	19.1	486	21.9	555	19.3	490	1.3 x 16	33 x 16
16	400	23.6	600	23.6	600	16.3	414	20.1	511	24.4	620	21.7	550	1.4 x 16	36 x 16
18	450	23.6	600	23.6	600	17.3	439	21.1	536	26.4	670	23.6	600	1.4 x 20	36 x 20
20	500	23.6	600	23.6	600	18.3	464	22.1	561	28.7	730	26.0	660	1.4 x 20	36 x 20
24	600	23.6	600	23.6	600	20.7	527	24.6	624	33.3	845	30.3	770	1.5 x 20	39 x 20
Other sizes on request															

IMPORTANT: ISO* sensor lay length according to ISO 20456



Flange EN 1092-1 / PN 40


Size DN		A Standard		A ISO*		B1		B2		D		K		d2 x n	
inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm
1/2	15	6.7	170	7.9	200	7.0	177	10.7	273	3.7	95	2.6	65	0.6 x 4	14 x 4
3/4	20	6.7	170	7.9	200	7.0	177	10.7	273	4.1	105	3.0	75	0.6 x 4	14 x 4
1	25	8.9	225	7.9	200	7.0	177	10.7	273	4.5	115	3.3	85	0.6 x 4	14 x 4
1-1/4	32	8.9	225	7.9	200	7.6	192	11.3	288	5.5	140	3.9	100	0.7 x 4	18 x 4
1-1/2	40	8.9	225	7.9	200	7.6	192	11.3	288	5.9	150	4.3	110	0.7 x 4	18 x 4
2	50	8.9	225	7.9	200	7.6	192	11.3	288	6.5	165	4.9	125	0.7 x 4	18 x 4
2-1/2	65	11.0	280	7.9	200	8.3	210	12.0	306	7.3	185	5.7	145	0.7 x 4	18 x 8
3	80	11.0	280	7.9	200	8.3	210	12.0	306	7.9	200	6.3	160	0.7 x 8	18 x 8
4	100	11.0	280	9.8	250	8.5	217	12.3	313	9.3	235	7.5	190	0.9 x 8	22 x 8
5	125	15.7	400	9.8	250	9.3	237	13.1	333	10.6	270	8.7	220	1.0 x 8	26 x 8
6	150	15.7	400	11.8	300	9.8	249	13.6	345	11.8	300	9.8	250	1.0 x 8	26 x 8
8	200	15.7	400	13.8	350	10.9	277	14.7	373	14.8	375	12.6	320	1.2 x 8	30 x 12
10	250	19.7	500	17.7	450	11.9	301	15.6	397	17.7	450	15.2	385	1.3 x 12	33 x 12
12	300	19.7	500	19.7	500	14.3	364	18.1	460	20.3	515	17.7	450	1.3 x 12	33 x 16
14	350	19.7	500	21.7	550	15.3	389	19.1	485	22.8	580	20.1	510	1.4 x 16	36 x 16
16	400	23.6	600	23.6	600	16.3	414	20.1	510	26.0	660	23.0	585	1.5 x 16	39 x 16
18	450	23.6	600	23.6	600	17.3	439	21.1	535	27.0	685	24.0	610	1.5 x 20	39 x 20
20	500	23.6	600	23.6	600	18.3	464	22.0	560	29.7	755	26.4	670	1.7 x 20	42 x 20
24	600	23.6	600	23.6	600	20.7	527	24.5	623	35.0	890	31.3	795	1.9 x 20	48 x 20
Other sizes on request															

IMPORTANT: ISO* sensor lay length according to ISO 20456



OIML APPROVED METER

The M5000 is type approved according to the international water meter standards OIML R49. The meter is approved as Class I and Class II for the detector sizes 2...24 inches (DN 50...600).

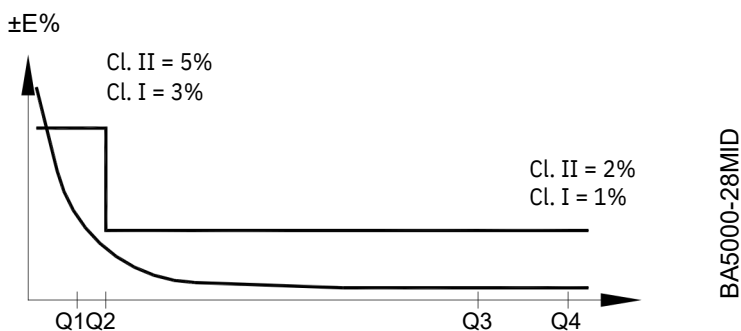

$Q2/Q1 = 1.6$ and $Q4/Q3 = 1.25$


Meter size		Bore	Accuracy class	Flow rates [m³/h]				Ratio Q3/Q1
				Min. Q1	Transitional Q2	Permanent Q3	Overload Q4	
DN 50	2 in.	FB	1 or 2	0.315	0.504	63	78.75	200
		RB	2	0.1575	0.252	63	78.75	400
DN 65	2 1/2 in.	FB	1 or 2	0.5	0.8	100	125	200
		RB	2	0.25	0.4	100	125	400
DN 80	3 in.	FB	1 or 2	0.8	1.28	160	200	200
		RB	2	0.4	0.64	160	200	400
DN 100	4 in.	FB	1 or 2	1	1.6	250	312.5	250
		RB	2	0.625	1	250	312.5	400
DN 125	5 in.	FB	1 or 2	1.6	2.56	400	500	250
		RB	2	0.8	1.28	200	250	400
DN 150	6 in.	FB	1 or 2	2.52	4.032	630	787.5	160
		RB	2	1.26	2.016	315	393.75	250
DN 200	8 in.	FB	1 or 2	6.25	10	1000	1250	160
		RB	2	3.125	5	500	625	250
DN 250	10 in.	FB	1 or 2	10	16	1600	2000	160
		RB	2	5	8	800	1000	250
DN 300	12 in.	FB	1 or 2	15.625	25	2500	3125	160
		RB	2	7.8125	12.5	1250	1562.5	250
DN 350	14 in.	FB	1 or 2	15.625	25	2500	3125	160
		RB	2	7.8125	12.5	1250	1562.5	250
DN 400	16 in.	FB	1 or 2	25	40	4000	5000	160
		RB	2	12.5	20	2000	2500	250
DN 450	18 in.	FB	1 or 2	39.375	63	6300	7875	160
		RB	2	19.6875	31.5	3150	3937.5	250
DN 500	20 in.	FB	1 or 2	39.375	63	6300	7875	160
		RB	2	19.6875	31.5	3150	3937.5	250
DN 600	24 in.	FB	1 or 2	50.4	80.64	8064	10080	125
		RB	2	25.2	40.32	4032	5040	250

FB - Full bore (Δp10) or RB - Reduced bore (Δp40)



MID APPROVED METER (MI-001)

The M5000 is type approved according to Directive 2004/22/EC of the European Parliament and Council of March 31, 2004 Measuring Instruments (MID) Annex MI-001. The meter is approved for the detector sizes 2...24 inches (DN 50...600).

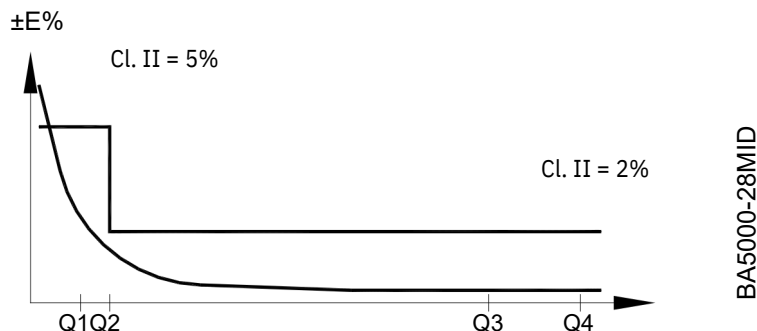

$Q2/Q1 = 1.6$ and $Q4/Q3 = 1.25$

Meter size		Bore	Flow rates [m³/h]				Ratio Q3/Q1
			Min. Q1	Transitional Q2	Permanent Q3	Overload Q4	
DN 50	2 in.	FB	0.315	0.504	63	78.75	200
		RB	0.1575	0.252	63	78.75	400
DN 65	2 1/2 in.	FB	0.5	0.8	100	125	200
		RB	0.25	0.4	100	125	400
DN 80	3 in.	FB	0.8	1.28	160	200	200
		RB	0.4	0.64	160	200	400
DN 100	4 in.	FB	1	1.6	250	312.5	250
		RB	0.625	1	250	312.5	400
DN 125	5 in.	FB	1.6	2.56	400	500	250
		RB	2.52	4.032	630	787.5	250
DN 150	6 in.	FB	6.4	10.24	1600	2000	250
		RB	6.4	10.24	1600	2000	250
DN 200	8 in.	FB	10	16	2500	3125	250
		RB	10	16	2500	3125	250
DN 250	10 in.	FB	16	25.6	4000	5000	250
		RB	16	25.6	4000	5000	250
DN 300	12 in.	FB	25.2	40.32	6300	7875	250
		RB	25.2	40.32	6300	7875	250
DN 350	14 in.	FB	40	10000	10000	12500	250
		RB	40	10000	10000	12500	250
DN 400	16 in.	FB					
		RB					
DN 450	18 in.	FB					
		RB					
DN 500	20 in.	FB					
		RB					
DN 550	22 in.	FB					
		RB					
DN 600	24 in.	FB					
		RB					

FB - Full bore (Δp_{10}) or RB - Reduced bore (Δp_{40})

350
DN
400
DN
450
DN
500
DN
600

ModMAG®Model M5000

September 2025

INTENTIONAL BLANK PAGE



 442 738 3918

 contacto@ingframex.com

 www.ingframex.com