



PIPEMINDER ONE

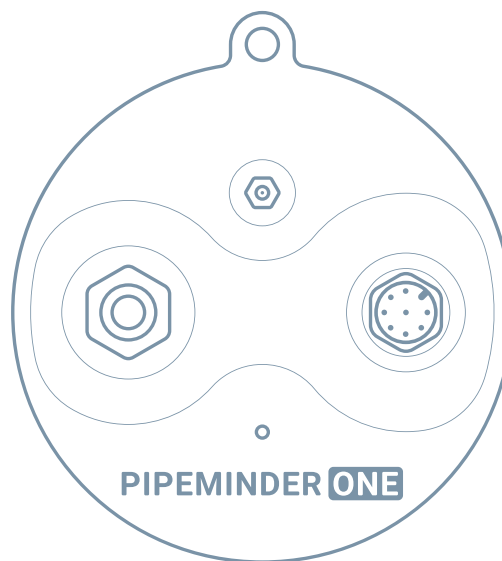

SPECIFICATIONS (STANDARD VERSION)

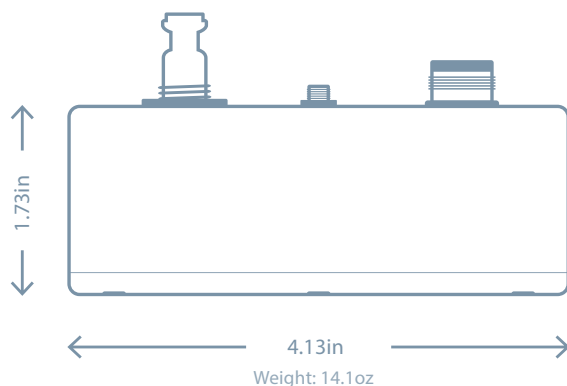

Operating Temperatures	32° F to +150° F (expansion of freezing water below 32°F will damage sensor)
Network / SIM	4G/3G/2G integrated SIM card
Pressure Sensor	0-300 psi absolute range, 128S/s, $\pm 0.25\%$ accuracy
Connection	21KA male connection with 1/4" NPT adapter (optional coiled hose available)
Materials	Acetal housing, 316L stainless steel pressure port, IP68 rated
Antenna	4G SMA connection (various external cellular antennas available)
Battery / Power	Choice of rechargeable / single use batteries (mains power / solar adaptors available)
GPS / Clock	GPS time & location synchronisation on deployment (continued clock synchronisation over cellular network)
Certifications	EN, CE, FCC