



PIPEMINDER ONE

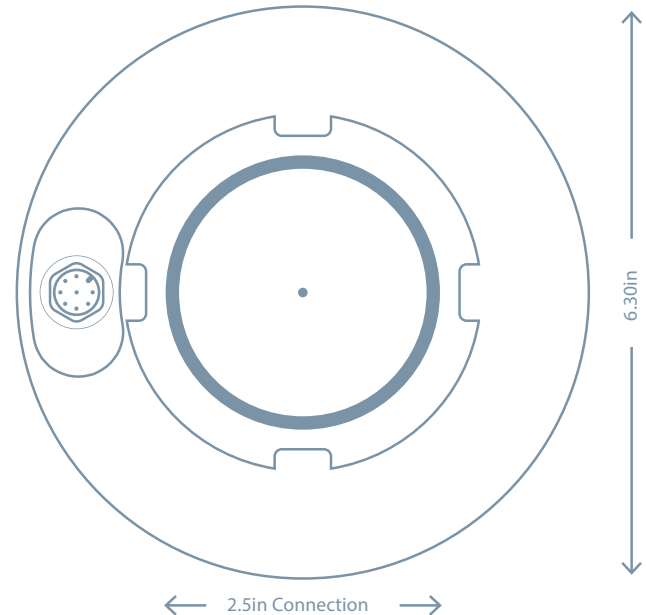

SPECIFICATIONS (HYDRANT SENSOR VERSION)

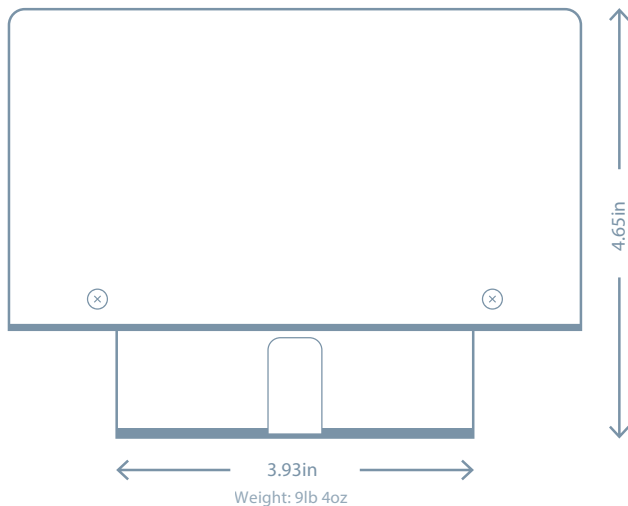

Operating Temperatures	32° F to +150°F (expansion of freezing water below 32°F will damage sensor)
Network / SIM	4G/3G/2G integrated SIM card (optional standard size SIM card supported)
Pressure Sensor	0-300 psi absolute range, 128S/s, $\pm 0.25\%$ accuracy
Connection	2.5" NST (NH) female connection, direct hydrant port mounting
Materials	316L stainless steel housing & pressure port, acetal cover, IP66 rated (nylon security cover included, 6.77in diameter x 5.78in height, 2lb)
Antenna	Integrated 4G antenna
Battery / Power	Integrated rechargeable LiFePo battery
GPS / Clock	GPS time & location synchronisation on deployment (continued clock synchronisation over cellular network)
Certifications	EN, CE, FCC

SYR-DS-05154-EN-01

Syrinix
A Badger Meter® Brand

☎ 442 738 3918
✉ contacto@ingframex.com
🌐 www.ingframex.com