



Transit Time Ultrasonic Flow Meters

TFX-5000 Meter

DESCRIPTION

The TFX-5000 transit time ultrasonic flow meter measures volumetric flow and heating/cooling energy rates in clean liquids as well as those with small amounts of suspended solids or aeration, such as surface water or raw sewage.

TFX-5000 flow and energy meters clamp onto the outside of pipes and do not contact the internal liquid.

BENEFITS

By clamping onto the outside of pipes, the meters have inherent advantages over other flow meter technologies, including:

- Reduced installation time and cost
- Non-invasive, non-contact measurement
- Continued operation during installation—no need to shut down the process
- No pressure head loss
- No moving parts to maintain or replace

FEATURES


- Large, bi-directional flow measuring range
- Data log up to 8 records
- Modbus® RTU or BACnet® MS/TP (BTL certification) over EIA-485; Modbus TCP/IP; BACnet/IP; EtherNet/IP; AquaCUE®/BEACON® connectivity
- Configuration and troubleshoot over USB or Bluetooth with SoloCUE app
- Reynolds, ultrasonic speed and temperature compensation
- Large, easy-to-read graphical display
- Rugged, aluminum enclosure for a long service life in harsh environments

APPLICATIONS

The TFX-5000 meter is available in a variety of configurations that permit the user to select a meter with features suitable to meet particular application requirements.


The TFX-5000 meter is available in two versions:

- A flow meter for water delivery, sewage, cooling water, water-glycol mixtures, alcohols and chemicals
- A heating/cooling energy flow meter used in conjunction with dual clamp-on RTDs for temperature measurement—ideal for hydronic process and HVAC applications

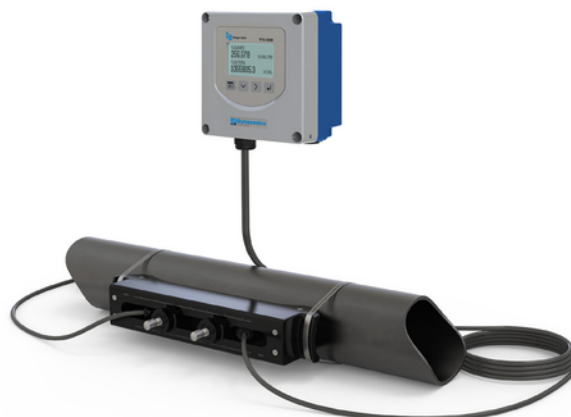

OPERATION

Transit time flow meters measure the time difference between the travel time of an ultrasound wave going *with* the fluid flow and *against* the fluid flow. The time difference is used to calculate the velocity of the fluid traveling in a closed-pipe system. The transducers used in transit time measurements operate alternately as transmitters and receivers. Transit time measurements are bi-directional and are most effective for fluids that have low concentrations of suspended solids and are sonically conductive.

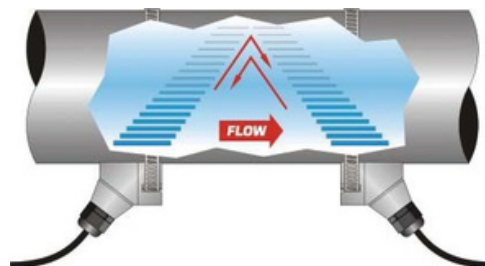

An ultrasonic meter equipped with heat flow capabilities measures the rate and quantity of heat delivered or removed from devices such as heat exchangers. By measuring the volumetric flow rate of the heat exchanger liquid, the temperature at the inlet pipe and the temperature at the outlet pipe, the energy usage can be calculated.





SPECIFICATIONS

System

Liquid Types	Most clean liquids or liquids containing small amounts of suspended solids or gas bubbles	
Flow Accuracy	Medium Pipes (JZ, KZ, NZ, RZ, WZ, HZ)	$\pm 0.5\% \pm 0.025$ ft/s (0.008 m/s) of reading
	Large Pipes (LZ, YZ)	$\pm 0.5\% \pm 0.049$ ft/s (0.015 m/s) of reading
	Small Pipes (CA-CT, UZ)	1 in. (25 mm) and larger = $\pm 1\% \pm 0.03$ ft/s (0.009 m/s) of reading 3/4 in. (20 mm) and smaller = $\pm 1\%$ of full scale
Repeatability	0.2% above 1.5 ft/s	
Velocity	Medium and Large Pipes	Up to 40 ft/s, depending on pipe and fluid
	Small Pipes	Up to 20 ft/s, depending on pipe and fluid
Straight Run Requirements	10 diameters upstream, 5 diameters downstream from single elbow	
Certification and Compliance	General Safety (all models): cCSAus; CE, Pollution Degree 2, CE compliance to Low Voltage Directive, 2014/35/EU; UKCA, Pollution Degree 2, UKCA compliance to Low Voltage Statutory Instrument 2016/1101 Bluetooth (display options S): U.S. FCC Part 15, Canada CAN ICES-003, Europe RED 2014/53/EU Transmitters with display and keypad are available without Bluetooth (display option P) U.S./Canada Hazardous Location transmitter and transducers: Transmitter and transducers (certification option B): cCSAus Class I Division 2 Groups ABCD T4 Requires flexible conduit Not available with UZ, HZ or JZ and KZ (Easy Rail) transducers, Auxiliary Dry Contact card or units with AquaCUE/BEACON endpoints Transmitter (certification option R): cCSAus Ex ec ic nC IIC T4 Gc; Ex tc IIIB T100° C Dc; Class I, Zone 2, AEx ec ic nC IIC T4 Gc; Zone 22, AEx tc IIIB T100° C Dc; Class II, Division 2, Groups FG; Class III Not available with Auxiliary Dry Contact card or units with AquaCUE/BEACON endpoints Transducers RZ LZ, NZ, RZ, WZ, YZ (certification option R): cCSAus Ex ec IIC T6 Gc; Ex tc IIIB T60° C Dc; Class I, Zone 2, AEx ec IIC T6 Gc; Zone 22, AEx tc IIIB T60° C Dc; Class II, Division 2, Groups FG; Class III Requires flexible conduit Not available with CA-CT, UZ, HZ or JZ and KZ (Easy Rail) transducers ATEX Hazardous Location: Transmitter (certification option V): II 3 G D Ex ec ic nC IIC T4 Gc, Ex tc IIIB T100° C Dc; Tamb: -25...60° C JZ (DTTJ), KZ (DTTK), LZ (DTTL), NZ (DTTN) and RZ (DTTR) Transducers: II 3 G D Ex ec IIC T6 Gc; Ex tc IIIB T60° C Dc; Tamb: -25...60° C Not available with UZ, CA to CT, or HZ transducers; flexible conduit, Auxiliary Dry Contact card or AquaCUE/BEACON endpoints UKEX Hazardous Location: Transmitter (certification option V): II 3 G D Ex ec ic nC IIC T4 Gc, Ex tc IIIB T100° C Dc; Tamb: -25...60° C JZ (DTTJ), KZ (DTTK), LZ (DTTL), NZ (DTTN) and RZ (DTTR) Transducers: II 3 G D Ex ec IIC T6 Gc; Ex tc IIIB T60° C Dc; Tamb: -25...60° C Not available with UZ, CA to CT, or HZ transducers; flexible conduit, Auxiliary Dry Contact card or AquaCUE/BEACON endpoints IECEx Hazardous Location: Transmitter (certification option V): Ex ec nC ic IIC T4 Gc; Ex tc IIIC T100° C Dc; Tamb: -25°C...60° C JZ, KZ, LZ, NZ and RZ Transducers: Ex ec IIC T6 Gc; Ex tc IIIB T60° C Dc; Tamb: -25...60° C Not available with UZ, CA to CT, or HZ transducers; flexible conduit, Auxiliary Dry Contact card or AquaCUE/BEACON endpoints	



Transmitter

Power Options	24V DC/AC	9...28V DC @ 8 W max. or 20...26 AC 47...63 Hz @ 0.5 A max., 2 Amp slow-blow fuse, not field replaceable
	Mains AC	85...264V AC 47...63 Hz @ 24VA max. 1 Amp slow-blow fuse, manually field replaceable Over-Voltage Rating Category II (CAT II)
Display	Options	Display with keypad or no display/keypad
	Keypad	4-button navigation, keypad with tactile feedback; polyester film
	Display	128 × 64 pixel LED backlit graphical display; adjustable brightness and timeout; polycarbonate window
	Flow rate/total	8-digit
Enclosure	NEMA Type 4X, IP67	
Construction	Aluminum construction; painted; wall, panel or pipe mounting; stainless steel fasteners and mounting hardware; EPDM gasket	
	Conduit Holes	(4) 1/2 in. NPT, M20 × 1.5 or 1/2 BSPP; cable glands available for NPT and M20
Environmental Ratings	Pollution Degree	2
	Altitude Restriction	Up to 2000 m (6561 ft)
	Ambient Temperature Range	4...140° F (–20...60° C)
	Storage Temperature Range	–40...176° F (–40...80° C)
	Humidity	0...85%, non-condensing
Configuration	Via optional keypad or SoloCUE configuration software; SoloCUE available on DVD or download	
Units (Field-S elec table)	Velocity	feet/second, meters/second
	Volumetric total	US Gallons, Million Gallons, Imperial Gallons, Million Imperial Gallons, Acre-Feet, Liters, Hectoliters, Cubic Meters, Cubic Feet, Oil Barrels (42 gallons), Fluid Barrels (31.5 gallons), Imperial Fluid Barrels (36 imperial gallons), Pounds (Kilograms) and custom units
	Flow rate	Acre Feet/Day, Liters/Second, Liters/Minute, Liters/Hour, Cubic Meters/Second, Cubic Meters/Minute, Cubic Meters/Hour, Cubic Feet/Minute, Cubic Feet/Minute, Cubic Feet/Hour, Gallons/Second, Gallons/Minute, Gallons/Hour, Million Gallons/Day, Imperial Gallons/Second, Imperial Gallons/Minute, Imperial Gallons/Hour, Million Imperial Gallons/Day, Oil Barrels/Day, Fluid Barrels/Day, Imperial Fluid Barrels/Day and custom units
	Energy total (energy meters)	British Thermal Unit (Btu), Thousand Btu, Millions Btu, Kilocalories, Mega calories, Kilowatt-hour, Megawatt hour, Kilojoules, Mega joules, Ton-hour (Refrigeration)
	Heat/cooling rate (energy meters)	Btu/hour, Thousand Btu/hour, Millions Btu/hour, Ton (Refrigeration), Watts, Kilowatts, Megawatts, Kilojoules/hour, Mega joules/hour, Kilocalories/hour, Mega calories/hour
	Temperature (energy meters)	Fahrenheit, Celsius, Kelvin

		Flow Meter	Energy Meter
Inputs and Outputs	0/4...20 mA output	One 16-bit, isolated, max 800 Ohms, internal or external power	Two 16-bit, isolated, max 800 Ohms, internal or external power
	Digital input	One 5...30V DC, isolated, externally or internally sourced, reset totalizer or alarm output	
	Digital output	Two selectable pulse, alarm, flow direction, sink isolated open collector, 5...30V DC, max. 50 mA externally or internally sourced, leakage current 1uA max.	Three selectable pulse, frequency, alarm, flow direction, isolated open collector, 5...30V DC, externally or internally sourced, leakage current 1uA max.
		Frequency output: 50% duty cycle, 63...10k Hz maximum frequency	
		Pulse (totalizer) output: Open collector, pulse width 1...500 ms programmable	
		Optional: Two dry contact output for alarm or flow direction 30V DC max., 5A max. (Ethernet not available with this option)	
	RTD (energy only)	None	Two 3-wire or 4-wire Pt100/Pt1000 RTD 12-bit inputs; Range of –40...200° C; Clamp-on resistor kits available
Ports	Programming EIA-	USB 2.0 mini B connector for connection to a device with SoloCUE Flow Device Manager app for Windows Optional Bluetooth for connection to a mobile device with SoloCUE Flow Device Manager app for Android or iOS	
	485	Modbus RTU command set or BACnet MS/TP; Baud rates 9600, 14400,19200, 38400, 57600, 76800, 115k; terminating resistor selectable	
	Ethernet	Optional 10/100 Base T RJ45, communication via Modbus TCP/IP, BACnet/IP or EtherNet/IP	
	AquaCUE/BEACON	Connectivity to AquaCUE/BEACON endpoint (LTE cellular)	
Data Logging	Number of points	Up to 8 parameters per record. Selectable 1 second to 1 day Transfer logs via memory card	
	Real Time Clock	Backed up with a super capacitor, minimum of 32 days of data retention without power; Requires no servicing	
	MicroSD card slot	8 GB card, included with transmitter	
Alarms	Records 150 previous alarms, warnings or errors		
Languages	English, French, German, Italian, Spanish		
Security	Four levels: Read-only, Operator, Service and Admin; 6-digit passcode number; selectable auto logout		



Transducers

Model	Construction	Cable Length Max.	Pipe/Tubing Sizes ²	Flow Rate Max. GPM (LPM)
CA-CT ⁵ fixed small pipe	CPVC, Ultem®, Nylon cord grip, PVC cable jacket; -40...194° F	100 ft	0.5...2 in.	190
UZ adjustable small pipe	CPVC, Ultem, and anodized aluminum track system; Nickel-plated brass connector with Teflon insulation; PVC cable jacket, -40...194° F (-40...90° C)	100 ft (30 m)	0.5...2 in. (12...50 mm)	190 (720)
NZ (IP67) DTTN standard pipe	CPVC, Ultem®, Nylon cord grip, PVC cable jacket; -40...194° F (-40...90° C)	300 ft (90 m)	2.5...12 in. (DN65...DN300)	4000
RZ (IP54) standard pipe	PBT glass filled, Ultem®, Nylon cord grip; PVC cable jacket; , -40...250° F (-40...121° C)	300 ft (90 m)	2.5...12 in. (DN65...DN300)	(15,000)
JZ, KZ (IP54) standard pipe, integrated rail	PBT glass filled, Ultem, Nylon cord grip; PVC cable jacket; -40...250° F (-40...121° C)	300 ft (90 m)	2.5...6 in. (DN65...DN150) 2.5...12 in. (DN65...DN300)	4000 4000 (15,000) (15,000)
WZ (IP68) ⁷ DTTN standard pipe, submersible	CPVC, Ultem, Nylon cord grip; Polyethylene cable jacket; -40...194° F (-40...90° C)	300 ft (90 m)	2.5...12 in. (DN65...DN300)	4000 (15,000)
HZ high temperature	PTFE, Vespel, Nickel-plated brass cord grip; FEP cable jacket; -40...350° F (-40...176° C)	300 ft (90 m)	2.5...12 in. (DN65...DN300)	4000 (15,000)
LZ (IP67) DTTL large pipe	CPVC, Ultem, Nylon cord grip PVC cable jacket; -40...194° F (-40...90° C)	300 ft (90 m) ⁶	8...48 in. (DN200...DN1200) ^{3,4}	33,000 (125,000)
YZ (IP68) ⁷ DTTL large pipe, submersible	CPVC, Ultem, Nylon cord grip; Polyethylene cable jacket; -40...194° F (-40...90° C)	300 ft (90 m) ⁶	8...48 in. (DN200...DN1200) ^{3,4}	33,000 (125,000)

¹ Recommendations based on onlined, new pipes with water. Recommended pipe or tubing sizes vary with pipe conditions and fluid.

² PVC, CPVC, HDPE, PTFE, PDVF, stainless steel, ductile iron, aluminum, brass naval, carbon steel copper.

³ Large pipe transducers are recommended for 8...12 in. pipes if normal velocity is expected to be greater than 12 ft/s (3.6 m/s).

⁴ Consult factory for larger pipe sizes.

⁵ Not for metric pipes.

⁶ Cable lengths up to 600 ft are available. Consult factory for lead times.

⁷ IP68 tested at 1 meter for 24 hours.

RTD Kits

Part Number	Description	Installation	RTD Type	Construction	Temperature Range
68996-001	RTD pair; 15 ft (4.5 m) cable	Pipe clamp, surface mount, IP54	Pt 1000, Class A $\pm (0.15 + 0.002 \cdot t)$ with t as temperature °C	Aluminum body, silicone cable jacket	-58...356° F (-50...180° C)
68996-002	RTD pair; 50 ft (15 m) cable				
68996-003	RTD pair; 100 ft (30 m) cable				

SoloCUE® Flow Device Manager App

The flow meter *may* be programmed through the keypad, SoloCUE app for Windows with a USB cable or SoloCUE mobile app via Bluetooth®. If the meter is ordered without a display/keypad, the flow meter *must* be programmed with SoloCUE app for Windows, Android or iOS. The app is used to configure, calibrate and communicate with TFX-5000 meters with English, French, German, Italian and Spanish menus. Additionally, it has numerous troubleshooting tools to make diagnosing and correcting installation problems easier.


SoloCUE app for Windows	Configure, calibrate and troubleshoot flow meters and control valves; Windows 8, 10 and 11	
USB Cable	RC820648	USB 2.0 mini B connector to A connector, shielded
SoloCUE App for Android and iOS	Configure, calibrate and troubleshooting TFX-5000 Ultrasonic clamp-on meters; Android 14 and later, iOS 16 and later, Bluetooth 4.2 and later	

A desktop monitor, a tablet, and a smartphone are shown side-by-side, all displaying the SoloCUE app interface. The monitor shows a complex flow diagram with various valves and meters. The tablet and smartphone show a simplified version of the interface with a list of devices and a 'Connect' button.




DIMENSIONS

Remote System Enclosure

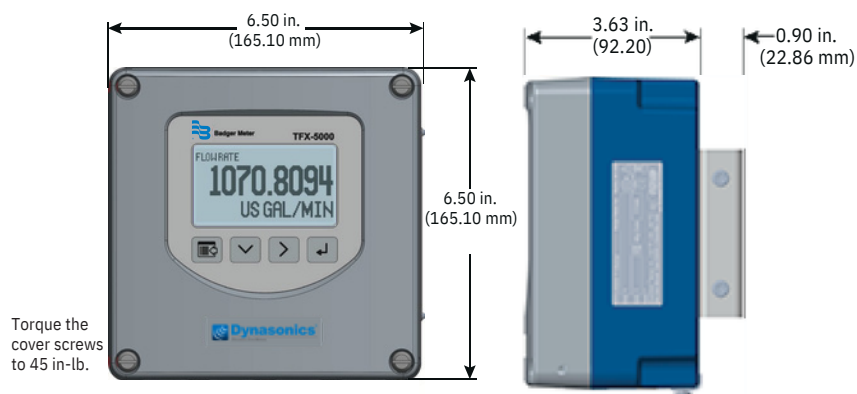

Panel Mount Enclosure

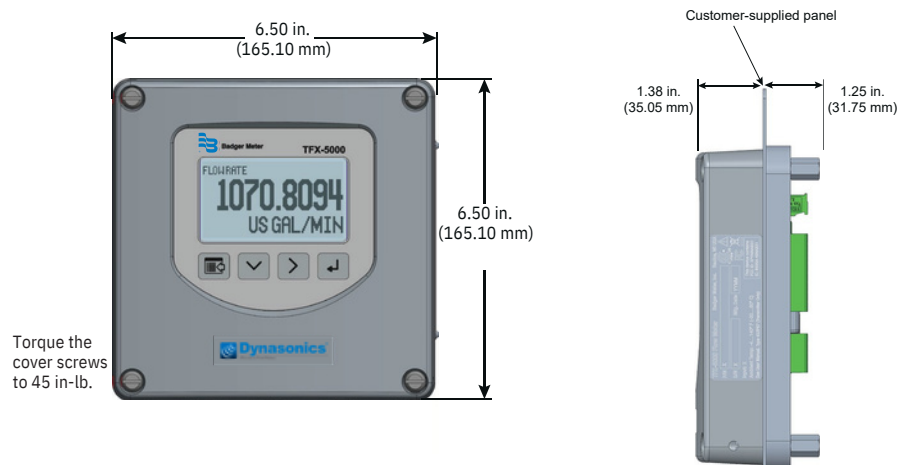


Consult factory for part number selection.



Transducers


Fixed Small Pipe

Pipes and Tubing 1/2...2 in. (Not for metric pipes.)

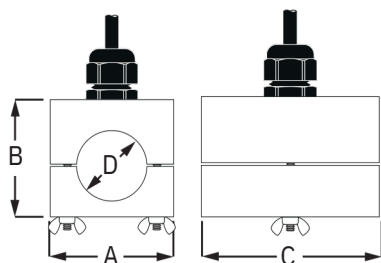

Fixed Small Pipe U-Bolt Connections CF, CL

ANSI/DN and Copper 2 in. Models (Not for metric pipes.)


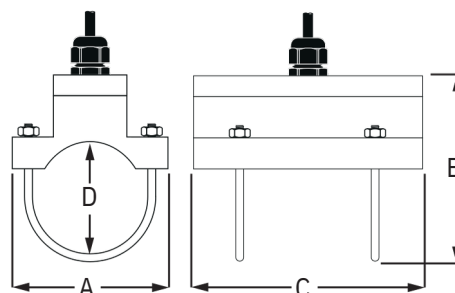


Pipe Size	Pipe Material	A	B	C	D
1/2 in.	ANSI/DN	2.46 in. (62.48 mm)	2.36 in. (59.94 mm)	2.66 in. (67.56 mm)	0.84 in. (21.34 mm)
	Copper	2.46 in. (62.48 mm)	2.36 in. (59.94 mm)	3.33 in. (84.58 mm)	0.63 in. (16.00 mm)
	Tubing	2.46 in. (62.48 mm)	2.28 in. (57.91 mm)	3.72 in. (94.49 mm)	0.50 in. (12.70 mm)
3/4 in.	ANSI/DN	2.46 in. (62.48 mm)	2.57 in. (65.28 mm)	2.66 in. (67.56 mm)	1.05 in. (26.67 mm)
	Copper	2.46 in. (62.48 mm)	2.50 in. (63.50 mm)	3.56 in. (90.42 mm)	0.88 in. (22.35 mm)
	Tubing	2.46 in. (62.48 mm)	2.50 in. (63.50 mm)	3.56 in. (90.42 mm)	0.75 in. (19.05 mm)
1 in.	ANSI/DN	2.46 in. (62.48 mm)	2.92 in. (74.17 mm)	2.86 in. (72.64 mm)	1.32 in. (33.53 mm)
	Copper	2.46 in. (62.48 mm)	2.87 in. (72.90 mm)	3.80 in. (96.52 mm)	1.13 in. (28.70 mm)
	Tubing	2.46 in. (62.48 mm)	2.75 in. (69.85 mm)	3.80 in. (96.52 mm)	1.00 in. (25.40 mm)
1-1/4 in.	ANSI/DN	2.80 in. (71.12 mm)	3.18 in. (80.77 mm)	3.14 in. (79.76 mm)	1.66 in. (42.16 mm)
	Copper	2.46 in. (62.48 mm)	3.00 in. (76.20 mm)	4.04 in. (102.62 mm)	1.38 in. (35.05 mm)
	Tubing	2.46 in. (62.48 mm)	3.00 in. (76.20 mm)	4.04 in. (102.62 mm)	1.25 in. (31.75 mm)
1-1/2 in.	ANSI/DN	3.02 in. (76.71 mm)	3.40 in. (86.36 mm)	3.33 in. (84.58 mm)	1.90 in. (48.26 mm)
	Copper	2.71 in. (68.83 mm)	2.86 in. (72.64 mm)	4.28 in. (108.71 mm)	1.63 in. (41.40 mm)
	Tubing	2.71 in. (68.83 mm)	3.31 in. (84.07 mm)	4.28 in. (108.71 mm)	1.50 in. (38.10 mm)
2 in.	ANSI/DN	3.70 in. (93.98 mm)	3.42 in. (86.87 mm)*	5.50 in. (139.70 mm)	2.38 in. (60.45 mm)*
	Copper	3.70 in. (93.98 mm)	3.38 in. (85.85 mm)*	5.50 in. (139.70 mm)	2.13 in. (54.10 mm)*
	Tubing	3.21 in. (81.53 mm)	3.85 in. (97.79 mm)	4.75 in. (120.65 mm)	2.00 in. (50.80 mm)



* Varies due to U-bolt configuration





RZ
Pipes Larger than 2 in. (50 mm)





NZ, WZ, HZ, LZ, YZ
Pipes Larger than 2 in. (50 mm)

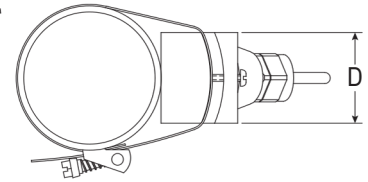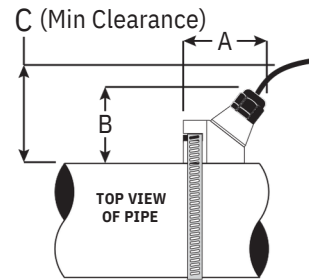

UZ
Adjustable Small Pipe

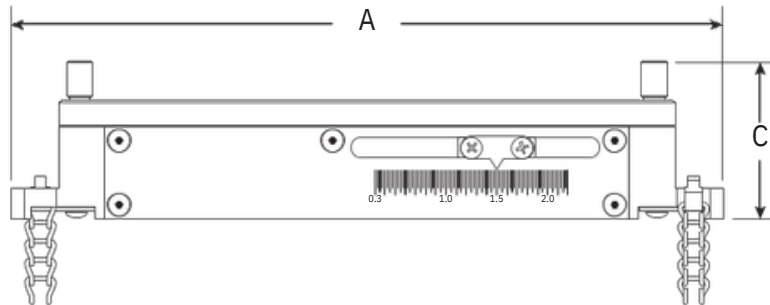

Easy Rail (JZ, KZ)

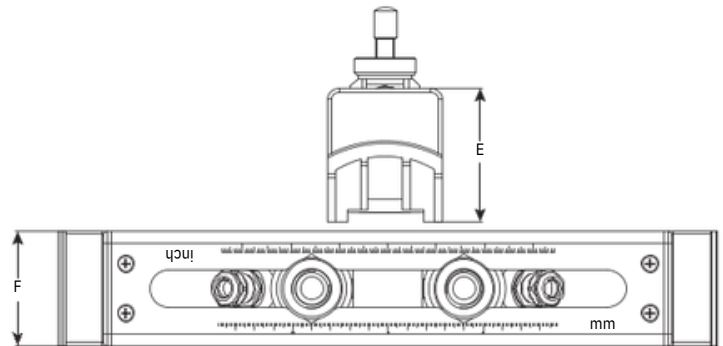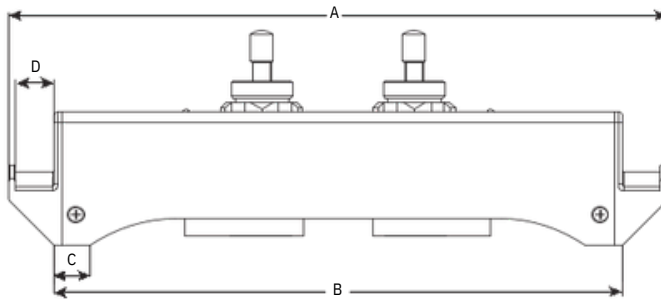

	RZ	NZ, WZ	HZ	LZ, YZ	UZ	JZ	KZ
A	3.75 in. (95 mm)	2.95 in. (74.9 mm)	2.95 in. (74.9 mm)	3.40 in. (86.4 mm)	7 in. (178 mm)	13.62 in. (345.95 mm)	19.92 in. (505.97 mm)
B	2.35 in. (60 mm)	2.75 in. (69.8 mm)	2.75 in. (69.8 mm)	2.94 in. (74.7 mm)	1.6 in. (42 mm)	11.73 in. (297.94 mm)	18.03 in. (457.96 mm)
C	—	3.00 in. (76.2 mm)	3.00 in. (76.2 mm)	3.20 in. (81.3 mm)	1.5 in. (39 mm)	0.75 in. (19.05 mm)	0.75 in. (19.05 mm)
D	2.19 in. (56 mm)	1.70 in. (43.2 mm)	1.71 in. (43.4 mm)	2.50 in. (63.5 mm)	—	0.79 in. (20.06 mm)	0.79 in. (20.06 mm)
E	—	—	—	—	—	2.76 in. (70.10 mm)	2.76 in. (70.10 mm)
F	—	—	—	—	—	2.36 in. (59.94 mm)	2.36 in. (59.94 mm)

* Transducer includes stainless steel type 201 strap and Dow 111 couplant. Other options are available.



PART NUMBER CONSTRUCTION

PartNumberConstructionforTFX-5000 Flow Meters for Pipes 2 in. and Smaller

	DQ	G	-	-	-	-	-	-	-	XX	-	-	-
Model													
TFX-5000 Ultrasonic Clamp-On Meter	DQ												
Certi cation													
General Area US/Canada, CE		G											
Transducer Type¹													
1/2 inch ANSI Pipe													CA
3/4 inch ANSI Pipe													CB
1 inch ANSI Pipe													CC
1-1/4 inch ANSI Pipe													CD
1-1/2 inch ANSI Pipe													CE
2 inch ANSI Pipe													CF
1/2 inch Copper Tube													C
3/4 inch Copper Tube													G
1 inch Copper Tube													C
1-1/4 inch Copper Tube													H
1-1/2 inch Copper Tube													CT
2 inch Copper Tube													CJ
Small pipe, universal, DTTSU (not available with conduit)													CK
													CL
Transmitter Type													
110/220V AC Remote Mounted													UZ
24V DC/AC Remote Mounted													R
													B
Display													
Display, Keypad and Bluetooth													S
Display, Keypad and no Bluetooth													P
Remote Cable Length													
15 feet (4.5 m)													AC
30 feet (9 m)													AF
50 feet (15 m)													AK
75 feet (23 m)													AR
100 feet													BW
Cable Type and Length (Conduit length is less than or equal to cable length)													
None													WW
5 feet (1.5 m)													AA
15 feet (4.5 m)													AC
30 feet (9 m)													AF
50 feet (15 m)													AK
75 feet (23 m)													AR
100 feet													BW
Hardware													
1/2 in. NPT Threads, Poly cable glands													S
1/2 in. NPT Threads, Nickel Plated Brass cable glands													T
1/2 in. NPT Threads, no cable glands													N
M20 Threads, Poly cable glands													C
M20 Threads, Nickel Plated Brass cable glands													D
M20 Threads, no cable glands													A
Endpoint Wiring Method													
None										XX			
Communication/Output													
Standard Output (Modbus RTU or BACnet MS/TP eld selectable)													S
Standard Output plus Modbus TCP Ethernet													T
Standard Output plus BACnet/IP Ethernet													V
Standard Output plus EtherNet/IP													U
Standard Output plus Aux Output													9
Units of Measure Totalizer/FlowRate²													
Gallons/gallons per minute													G
Liters/liters per minute													P
Testing & Tagging													
Factory Calibrated													F
Factory Calibrated/Stainless Steel Tag													S

¹ Stainless steel tube 1/2...2 in. options are available.

² Field selectable, additional options available.



Part Number Construction for TFX-5000 Flow Meters for Pipes 2 in. and Smaller for Hazardous Locations

Model		DQ	B	-	-	-	-	-	-	-	-	XX	-	-	-
TFX-5000 Ultrasonic Clamp-On Meter		DQ													
Certification															
Hazardous Location, Class I, Division 2		B													
Transducer Type ¹															
1/2 inch ANSI Pipe		CA													
3/4 inch ANSI Pipe		CB													
1 inch ANSI Pipe		CC													
1-1/4 inch ANSI Pipe		CD													
1-1/2 inch ANSI Pipe		CE													
2 inch ANSI Pipe		CF													
1/2 inch Copper Tube		C													
3/4 inch Copper Tube		G													
1 inch Copper Tube 1-1/4 inch Copper Tube		C													
1-1/2 inch Copper Tube		H													
1-1/2 inch Copper Tube 2 inch Copper Tube		CT													
Tube		CJ													
Transmitter Type		CK													
110/220V AC Remote Mounted		CL													
24V DC/AC Remote Mounted															
Display															
Display, Keypad and Bluetooth															
Display, Keypad and no Bluetooth															
Remote Cable/Conduit Length ²															
15 feet (4.5 m)															
30 feet (9 m)															
50 feet (15 m)															
75 feet (23 m)															
100 feet															
Hazardous Location															
1/2 in. NPT Threads, Poly cable glands															
1/2 in. NPT Threads, Nickel Plated Brass cable glands															
1/2 in. NPT Threads, no cable glands															
M20 Threads, Poly cable glands															
M20 Threads, Nickel Plated Brass cable glands															
M20 Threads, no cable glands															
Endpoint Wiring Method															
None															
Communication/Output															
Standard Output (Modbus RTU or BACnet MS/TP field selectable)															
Standard Output plus Modbus TCP Ethernet															
Standard Output plus BACnet/IP Ethernet															
Standard Output plus EtherNet/IP															
Units of Measure/Totalizer/FlowRate ³															
Gallons/gallons per minute															
Liters/liters per minute															
Testing & Tagging															
Factory Calibrated															
Factory Calibrated/Stainless Steel Tag															

¹Stainless steel tube 1/2...2 in. options are available.

²For hazardous location units, Remote Cable and Conduit Length codes must match.

³Field selectable, additional options available.



Part Number Construction for TFX-5000 Flow Meters for Pipes Larger than 2 in.

Model		DQ - G - - - - - - - - - - XX - - - - -	
TFX-5000 Ultrasonic Clamp-On Meter		DQ	
Certification		G	
General Area US/Canada, CE			
Transducer Type			
Medium pipe, DTTR, 2.5 in. (65 mm) or larger		RZ	
Medium pipe, submersible DTTN, 2.5 in. (65 mm) or larger		WZ	
2.5...6 inches (65...150 mm) Easy Rail (not available with conduit)		JZ	
2.5...12 inches (65...300 mm) Easy Rail (not available with conduit)		KZ	
Medium pipe, high temperature (not available with conduit)		HZ	
Large pipe, DTTL, 8 in. (200 mm) or larger		LZ	
Large pipe, submersible DTTL, 8 in. (200 mm) or larger		YZ	
Transmitter Type			
110/220V AC Remote Mounted		R	
24V DC/AC Remote Mounted		B	
Display			
Display, Keypad and Bluetooth		S	
Display, Keypad and no Bluetooth		P	
Remote Cable Length			
15 feet (4.5 m)		AC	
30 feet (9 m)		AF	
50 feet (15 m)		AK	
75 feet (23 m)		AR	
100 feet (30 m)		BW	
150 feet (46 m)		BK	
200 feet (61 m)		DW	
250 feet (76 m)		DK	
300 feet (90 m)		EW	
350 feet (107 m) (DTTL "LZ" and "YZ" only)		EK	
400 feet (122 m) (DTTL "LZ" and "YZ" only)		FW	
450 feet (137 m) (DTTL "LZ" and "YZ" only)		FK	
500 feet (152 m) (DTTL "LZ" and "YZ" only)		GW	
550 feet (168 m) (DTTL "LZ" and "YZ" only)		GK	
600 feet (183 m) (DTTL "LZ" and "YZ" only)		HW	
Conduit Type and Length (Conduit length is less than or equal to cable length)			
None		WW	
5 feet (1.5 m)		AA	
15 feet (4.5 m)		AC	
30 feet (9 m)		AF	
50 feet (15 m)		AK	
75 feet (23 m)		AR	
100 feet (30 m)		BW	
150 feet (46 m)		BK	
200 feet (61 m)		DW	
250 feet (76 m)		DK	
300 feet (90 m)		EW	
Hardware			
1/2 in. NPT Threads, Poly cable glands		S	
1/2 in. NPT Threads, Nickel Plated Brass cable glands		T	
1/2 in. NPT Threads, no cable glands		N	
M20 Threads, Poly cable glands		C	
M20 Threads, Nickel Plated Brass cable glands		D	
M20 Threads, no cable glands		A	
Endpoint Wiring Method			
None		XX	
Communication/Output			
Standard Output (Modbus RTU or BACnet MS/TP field selectable)		S	
Standard Output plus Modbus TCP Ethernet		T	
Standard Output plus BACnet/IP Ethernet		V	
Standard Output plus EtherNet/IP		U	
Standard Output plus Aux Output		9	
Units of Measure			
Totalizer/FlowRate ²			
Gallons/gallons per minute		G	
Liters/liters per minute		P	
Testing & Tagging			
Factory Calibrated		F	
Factory Calibrated/Stainless Steel Tag		S	

¹ Submersible transducer cables use two conduit openings.² Field selectable, additional options available.

**Part Number Construction for TFX-5000 Flow Meters for Pipes Larger than 2 in. for U.S./Canada Hazardous Locations**

		DQ	-		-		-		-		-		-	XX	-		-		
Model																			
TFX-5000 Ultrasonic Clamp-On Meter		DQ																	
Certi cation																			
Hazardous Location, Class I, Division 2		B																	
Hazardous Location Class I, Div 2, Zone 2/22; Class		R																	
Transducer Type																			
Medium pipe, DTTR, 2.5 in. (65 mm) or larger		RZ																	
Medium pipe, submersible DTTN, 2.5 in. (65 mm) or larger ¹		WZ																	
Large pipe, DTTL, 8 in. (200 mm) or larger		LZ																	
Large pipe, submersible DTTL, 8 in. (200 mm) or larger ¹		YZ																	
Transmitter Type																			
110/220V AC Remote Mounted		R																	
24V DC/AC Remote Mounted		B																	
Display																			
Display, Keypad and Bluetooth		S																	
Display, Keypad and no Bluetooth		P																	
Remote Cable/Conduit Length																			
15 feet (4.5 m)																			
30 feet (9 m)																			
50 feet (15 m)																			
75 feet (23 m)																			
100 feet (30 m)																			
150 feet (46 m)																			
200 feet (61 m)																			
250 feet (76 m)																			
Headwa e																			
1/2 in. (12.7 mm) NPT Threads, Poly cable glands																			
1/2 in. NPT Threads, Nickel Plated Brass cable glands																			
1/2 in. NPT Threads, no cable glands																			
M20 Threads, Poly cable glands																			
M20 Threads, Nickel Plated Brass cable glands																			
M20 Threads, no cable glands																			
Endpoint Wiring Method																			
None																			
Communication/Output																			
Standard Output (Modbus RTU or BACnet MS/TP eld selectable)																			
Standard Output plus Modbus TCP Ethernet																			
Standard Output plus BACnet/IP Ethernet																			
Standard Output plus EtherNet/IP																			
Units of Measure Totalizer/Flow Rate																			
Gallons/gallons per minute																			
Liters/liters per minute																			
Testing & Tagging																			
Factory Calibrated																			
Factory Calibrated/Stainless Steel Tag																			

¹ Submersible transducer cables use two conduit openings.² Field selectable, additional options available.



Part Number Construction for TFX-5000 Flow Meters for Pipes Larger than 2 in. for ATEX/IECEx Hazardous Locations

DQ - - - - - - - XX - - -									
Model									
TFX-5000 Ultrasonic Clamp-On Meter									
DQ									
Certi cation									
Hazardous Location, ATEX Zone 2/22, IECEx Zone 2, UKEXV									
Transducer Type									
Medium pipe, DTTR, 2.5 in. (65 mm) or larger									
RZ									
Medium pipe, submersible DTTN, 2.5 in. (65 mm) or larger ¹									
WZ									
2.5...6 inches (65...150 mm) Easy Rail (not available with									
JZ									
conduit 2.5...12 inches (65...300 mm) Easy Rail (not available									
KZ									
with condu Large pipe, DTTL, 8 in. (200 mm) or larger									
LZ									
Large pipe, submersible DTTL, 8 in. (200 mm) or larger ¹									
YZ									
Transmitter Type									
110/220V AC Remote Mounted									
R									
24V DC/AC Remote Mounted									
B									
Display									
Display, Keypad and Bluetooth									
S									
Display, Keypad and no Bluetooth									
P									
Remote Cable Length									
15 feet (4.5									
AC									
m) 30 feet (9									
AF									
m) 50 feet (15									
AK									
m) 75 feet (23									
AR									
m) 100 feet									
BW									
(30 m) 150									
BK									
feet (46 m)									
DW									
200 feet (61									
DK									
Conduit Type and Length (Conduit length is less than or equal to cable length)									
2 in. (50 mm)									
WW									
Hardware									
1/2 in. NPT Threads, Poly cable glands									
S									
1/2 in. NPT Threads, Nickel Plated Brass cable glands									
T									
1/2 in. NPT Threads, no cable glands									
N									
M20 Threads, Poly cable glands									
C									
M20 Threads, Nickel Plated Brass cable glands									
D									
M20 Threads, no cable glands									
A									
Endpoint Wiring Method									
None									
XX									
Communication/Output									
Standard Output (Modbus RTU or BACnet MS/TP eld selectable)									
S									
Standard Output plus Modbus TCP Ethernet									
T									
Standard Output plus BACnet/IP Ethernet									
V									
Standard Output plus EtherNet/IP									
U									
Units of Measure Totalizer/Flow Rate²									
Gallons/gallons per minute									
G									
Liters/liters per minute									
P									
Testing & Tagging									
Factory Calibrated									
F									
Factory Calibrated/Stainless Steel Tag									
S									

¹ Submersible transducer cables use two conduit openings.

² Field selectable, additional options available.



Part Number Construction for TFX-5000 Energy Meters for Pipes 2 in. and Smaller

	DR	-	G	-	-	-	-	-	-	-	-	-	XX	-	-	-	-
Model																	
TFX-5000 Ultrasonic Clamp-On Meter	DR																
Certification																	
General Area US/Canada, CE	G																
Transducer Type¹																	
1/2 inch ANSI Pipe																CA	
3/4 inch ANSI Pipe																CB	
1 inch ANSI Pipe																CC	
1-1/4 inch ANSI Pipe																CD	
1-1/2 inch ANSI Pipe																CE	
2 inch ANSI Pipe																CF	
1/2 inch Copper Tube																CG	
3/4 inch Copper Tube																CH	
1 inch Copper Tube																CT	
1-1/4 inch Copper Tube																CJ	
1-1/2 inch Copper Tube																CK	
2 inch Copper Tube																CL	
Small pipe, universal, DTTSU (not available with conduit)																UZ	
Transmitter Type																	
110/220V AC Remote Mounted																R	
24V DC/AC Remote Mounted																B	
Display																	
Display, Keypad and Bluetooth																S	
Display, Keypad and no Bluetooth																P	
Remote Cable Length																	
15 feet (4.5 m)																AC	
30 feet (9 m)																AF	
50 feet (15 m)																AK	
75 feet (23 m)																AR	
100 feet																BW	
Cable Type and Length (Conduit length is less than or equal to cable length)																	
None																WW	
5 feet (1.5 m)																AA	
15 feet (4.5 m)																AC	
30 feet (9 m)																AF	
50 feet (15 m)																AK	
75 feet (23 m)																AR	
100 feet																BW	
RTD Type																	
Surface, Commercial																C	
None (user provided)																X	
RTD Cable Length																	
15 feet																AC	
50 feet																AK	
100 feet																BW	
None (user provided)																WW	
Hardware																	
1/2 in. NPT Threads, Poly cable glands																S	
1/2 in. NPT Threads, Nickel Plated Brass cable glands																T	
1/2 in. NPT Threads, no cable glands																N	
Endpoint Wiring Method																	
None																XX	
Communication/Output																	
Standard Output (Modbus RTU or BACnet MS/TP eld selectable)																S	
Standard Output plus Modbus TCP Ethernet																T	
Standard Output plus BACnet/IP Ethernet																V	
Standard Output plus EtherNet/IP																U	
Standard Output plus Auxiliary Dry Contact Output																9	
Units of Measure Totalizer/FlowRate²																	
Gallons/gallons per minute																G	
Liters/liters per minute																P	
Units of Measure Energy Totalizer/Rate																	
Kilowatt-hour/Watt (eld selectable, additional options available)																R	
Testing & Tagging																	
Factory Calibrated																F	
Factory Calibrated/Stainless Steel Tag																S	

¹ Stainless steel tube 1/2...2 in. options are available.² Field selectable, additional options available.

DR	-	G	-		-		-		-		-		-		-	XX	-		-		-		-	
----	---	---	---	--	---	--	---	--	---	--	---	--	---	--	---	----	---	--	---	--	---	--	---	--

¹ Contact factory for DTTL cable lengths longer than 300 ft.
² Submersible transducer cables use two conduit openings.
³ Field selectable, additional options available.

THIS PAGE INTENTIONALLY BLANK



442 738 3918



contacto@ingframex.com



www.ingframex.com

