




# VAISALA

## HMP5 Relative Humidity and Temperature Probe

For high temperatures

### Features

- RH accuracy up to  $\pm 0.8\%$  RH
- Temperature accuracy up to  $\pm 0.1\text{ }^{\circ}\text{C}$  ( $\pm 0.18\text{ }^{\circ}\text{F}$ )
- Temperature measurement range  $-70 \dots +180\text{ }^{\circ}\text{C}$  ( $-94 \dots +356\text{ }^{\circ}\text{F}$ )
- Operating temperature of probe body  $-40 \dots +80\text{ }^{\circ}\text{C}$  ( $-40 \dots +176\text{ }^{\circ}\text{F}$ )
- Sensor purge improves long-term stability and chemical resistance
- Modbus® RTU over RS-485
- 250-mm (9.84 in) probe allows easy process installation through insulation
- Compatible with Vaisala Indigo products and Insight PC software
- Traceable calibration certificate: 6 points for humidity, 1 point for temperature

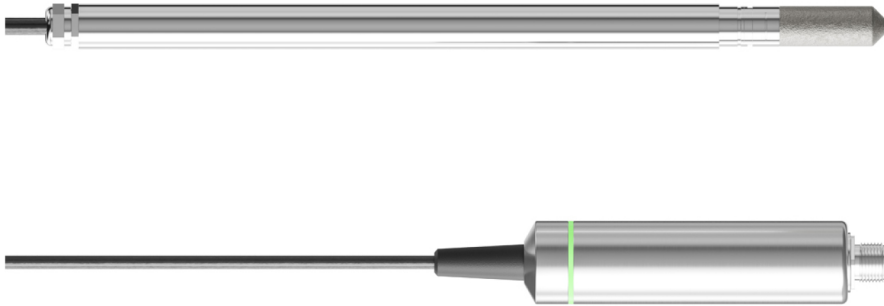

Vaisala HUMICAP® Humidity and Temperature Probe HMP5 is designed for high-temperature applications such as baking ovens, pasta dryers, and industrial drying kilns, where measurement performance and chemical tolerance are essential.

### Proven Vaisala HUMICAP® performance

Vaisala is the original innovator of the thin-film capacitive humidity measurement technology, which has now become the industry standard in humidity measurement.

HUMICAP® technology results from Vaisala's 40-year experience in industrial humidity measurement, providing the best stability, fast response time, and low hysteresis in a wide range of applications.

### Sensor purge minimizes effects of contaminants

In environments with high concentrations of chemicals and cleaning agents, the sensor purge option helps to maintain measurement accuracy between calibration intervals.

Sensor purge involves heating the sensor to remove harmful chemicals. The function can be initiated manually or programmed to occur at set intervals.

### Flexible connectivity

The probe can be used as a standalone digital Modbus RTU transmitter over an RS-485 serial bus, and it can also be connected to Indigo transmitters and the Indigo80 handheld indicator. For easy-to-use access to field calibration, device analytics, and configuration functionality, the probe can be connected to Vaisala Insight software for Windows®. For more information, see [www.vaisala.com/insight](http://www.vaisala.com/insight).

### Vaisala Indigo product family

Indigo transmitters extend the capabilities of Indigo-compatible measurement probes. The transmitters can display measurements on the spot as well as transmit them to automation systems through analog signals, digital outputs, and relays. Cable length between probe and transmitter can be extended to up to 30 meters.

The Indigo80 handheld indicator is ideal for spot-checking and process monitoring, as well as for configuring, troubleshooting, calibrating, and adjusting the probe. For more information, see [www.vaisala.com/indigo](http://www.vaisala.com/indigo).




# Technical data


## Measurement performance

| Relative humidity                             |                                                   |
|-----------------------------------------------|---------------------------------------------------|
| Measurement range                             | 0–100 %RH, at max. +95 °C (203 °F) T <sub>d</sub> |
| Accuracy at +23 °C (+73.4 °F) <sup>1)</sup>   | ±0.8 %RH (0–90 %RH)                               |
| Factory calibration uncertainty <sup>2)</sup> | ±0.5 %RH (0–40 %RH)<br>±0.8 %RH (40–95 %RH)       |
| T <sub>63</sub> response time                 | 15 s                                              |
| Sensor options                                | HUMICAP® R2<br>HUMICAP® R2C <sup>3)</sup>         |
| Temperature                                   |                                                   |
| Measurement range                             | –70 ... +180 °C (–94 ... +356 °F)                 |
| Accuracy at +23 °C (+73.4 °F) <sup>1)</sup>   | ±0.1 °C (±0.18 °F)                                |
| Factory calibration uncertainty <sup>2)</sup> | ±0.1 °C (±0.18 °F) at +23 °C (+73.4 °F)           |
| Sensor                                        | Pt100 RTD Class FO.1 IEC 60751                    |

- 1) Defined against calibration reference. Including non-linearity, hysteresis, and repeatability.  
 2) Defined as ±2 standard deviation limits. Small variations possible; see calibration certificate.  
 3) Sensor purge feature available with this sensor.

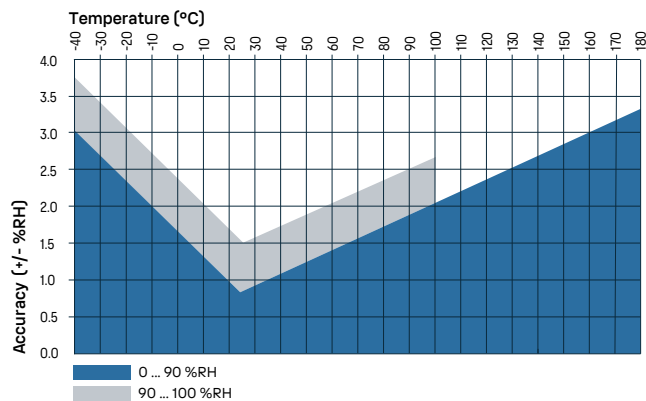

HMP5 humidity measurement accuracy as a function of temperature

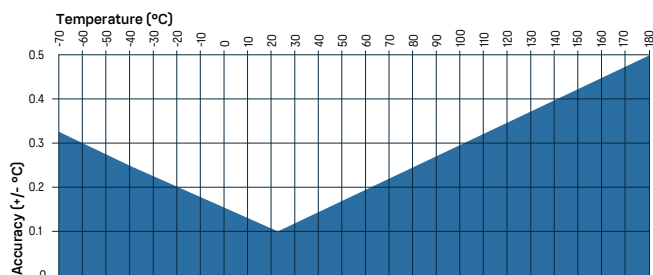

HMP5 temperature measurement accuracy over full range

## Operating environment

|                                     |                                      |
|-------------------------------------|--------------------------------------|
| Operating temperature of probe body | –40 ... +80 °C (–40 ... +176 °F)     |
| Operating temperature of probe head | –70 ... +180 °C (–94 ... +356 °F)    |
| Operating humidity of probe head    | Max. +100 °C (212 °F) T <sub>d</sub> |
| Storage temperature                 | –40 ... +80 °C (–40 ... +176 °F)     |
| Operating environment               | Suitable for outdoor use             |
| IP rating of probe body             | IP66                                 |

## Inputs and outputs

|                     |                            |
|---------------------|----------------------------|
| Operating voltage   | 15–30 V DC                 |
| Current consumption | 10 mA typical, 500 mA max. |
| Digital output      | RS-485, non-isolated       |
| Protocols           | Modbus RTU                 |

## Output parameters

|                                              |                                         |
|----------------------------------------------|-----------------------------------------|
| Absolute humidity (g/m <sup>3</sup> )        | Relative humidity (%RH)                 |
| Absolute humidity at NTP (g/m <sup>3</sup> ) | Relative humidity (dew/frost) (%RH)     |
| Dew point temperature (°C)                   | Temperature (°C)                        |
| Dew/frost point temperature (°C)             | Water concentration (ppm <sub>v</sub> ) |
| Dew/frost point temperature at 1 atm (°C)    | Water concentration (wet basis) (vol-%) |
| Dew point temperature at 1 atm (°C)          | Water mass fraction (ppm <sub>w</sub> ) |
| Dew point temperature difference (°C)        | Water vapor pressure (hPa)              |
| Enthalpy (kJ/kg)                             | Water vapor saturation pressure (hPa)   |
| Mixing ratio (g/kg)                          | Wet-bulb temperature (°C)               |

## Compliance

|                                     |                                                                                  |
|-------------------------------------|----------------------------------------------------------------------------------|
| EU directives and regulations       | EMC Directive (2014/30/EU)<br>RoHS Directive (2011/65/EU) as amended by 2015/863 |
| Electromagnetic compatibility (EMC) | EN 61326-1, industrial environment                                               |
| Type approvals                      | DNV GL certificate no. TAA00002YT                                                |
| Compliance marks                    | CE, China RoHS, RCM                                                              |




## Mechanical specifications

| Connector                 | M12 5-pin A-coded male          |
|---------------------------|---------------------------------|
| Weight (with a 2-m cable) | 436 g (15.37 oz)                |
| Probe cable length        | 2 m (6.56 ft) or 10 m (32.8 ft) |
| Materials                 |                                 |
| Probe                     | AISI 316L                       |
| Probe body                | AISI 316L                       |
| Cable jacket              | FEP                             |


## Accessories

|                                  |          |
|----------------------------------|----------|
| Mounting flange                  | 210696   |
| Indigo USB adapter <sup>1)</sup> | USB2     |
| Calibration adapter for HMK15    | 211302SP |

- <sup>1)</sup> Vaisala Insight software for Windows available at [www.vaisala.com/insight](http://www.vaisala.com/insight).

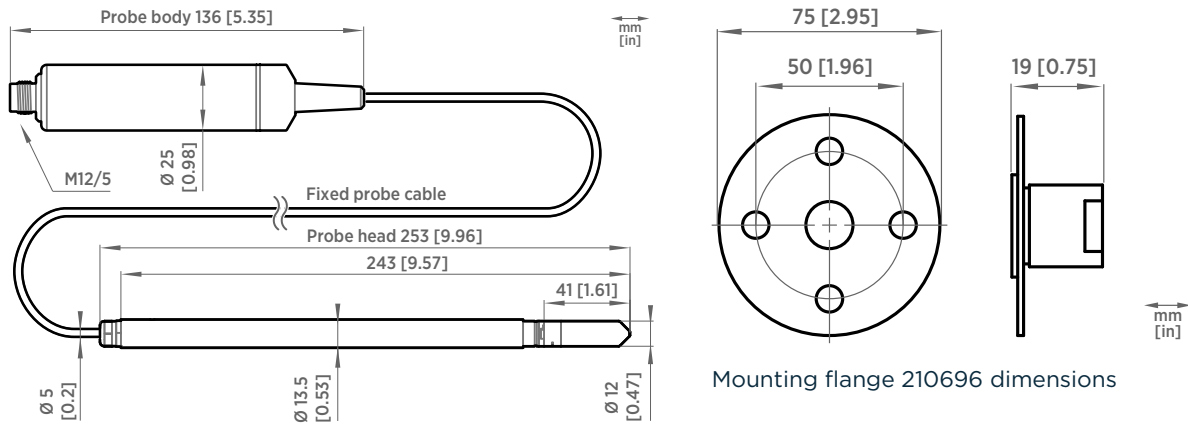

HMP5 probe dimensions

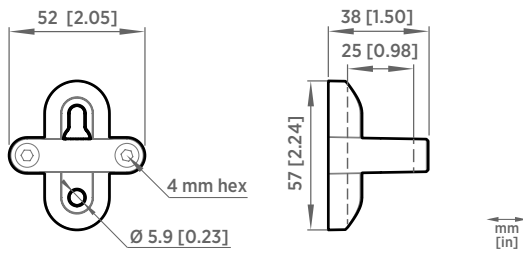

Probe holder ASM213582 dimensions

442 738 3918 ☎

[www.ingframex.com](http://www.ingframex.com) 🌐

[contacto@ingframex.com](mailto:contacto@ingframex.com) ✉

Published by Vaisala | B211684EN-F © Vaisala 2024

All rights reserved. Any logos and/or product names are trademarks of Vaisala or its individual partners. Any reproduction, transfer, distribution or storage of information contained in this document is strictly prohibited. All specifications — technical included — are subject to change without notice.